

Visualization of Reading Skills

Oleg Špakov, Harri Siirtola, Howell Istance, Kari-Jouko Räihä

Visual Interaction Research Group (VIRG)

TAUCHI Research Center

Faculty of Communication Sciences

University of Tampere

Several popular visualizations of gaze data, such as scanpaths and heatmaps, can be used independently of the viewing task. For a specific task, such as reading, more informative visualizations can be created. We have developed several such techniques, some dynamic and some static, to communicate the reading activity to children of primary school teachers. The goal of the visualizations was to highlight the reading skills to a teacher with no background in the theory of eye movements or eye tracking technology. Evaluations of the techniques indicate that, as intended, they serve different purposes and were appreciated by the school teachers. Dynamic visualizations help to give the teachers a good understanding of how the individual students read, whereas static visualizations help in getting a simple overview of how the children read as a group and of their active vocabulary.

Introduction

Imagine a class of schoolchildren refining their reading skills. They read the text silently, and they might indicate their progress by pointing to the current word with a finger. Their teacher moves around and observes, and intervenes when someone has problems. An experienced teacher knows the ones who really struggle and those who read fluently. However, there is usually a large number of pupils that are in between – they do have occasional reading difficulties, but generally they advance steadily. For the teacher, it is a challenge to assess the progress of this group, or gain an overview of progress in the whole class.

The scenario above has many variations, but common to them all is that the teacher is getting insufficient information about individual readers. Eye tracking is a technology that reveals where a person is looking at when they use a computer, and it can be used, e.g., to provide detailed information on how reading advances. Eye trackers are becoming cheaper and ubiquitous, and it is time to consider how they could be applied to analyzing the progress of reading skills.

We are developing a system to be used in schools to analyze reading performance. Data from individual readers can be logged, so that a child's reading progress over time can be

studied. If all of the children in a class are using the system, then the words causing problems to several children can be shared with the teacher as they happen. The teacher could use this information immediately to focus on these problems. Alternatively, the teacher could review the reading performance of some, or all, of the children after the lesson.

Eye tracking produces a large amount of data, so it is essential to find efficient visualizations for these needs. We first discuss the visualization of gaze data, and then introduce our system, a web application that has been developed to analyze users' reading performance, and finally, describe its visualizations that present the collected data.

Visualization of Gaze Data

Karn, Ellis, and Juliano (2000) gave the following characterization for the data abstraction levels of gaze data, along with the most commonly used data types:

First order data Raw, unfiltered data: x , y position, pupil diameter, and blink signal. Some trackers give the distance (z -coordinate), and some trackers do not output the unprocessed data at all.

Second order data Fixations, saccades, and pursuit eye movements (gaze smoothly following a target).

Third order data Scanpaths, fixation times for predefined areas of interest (AOIs), and matrix of transition probabilities between areas of interest.

Fourth order data Scanpath shape, complexity, and variability.

These data types are the building blocks for the visualizations of gaze data, and the most common gaze data visualizations are based on the second and third level data. The visualization of gaze data has been studied extensively, and a recent review by Blascheck et al. (2017) reports the state of the art. In this section, we review the concepts and methods relevant to the visualization of reading.

Scanpath

A common static visualization of gaze data is a *scanpath*, a diagram of nodes and edges where the nodes are fixations and the edges are saccades. A scanpath is usually drawn as an overlay on top of the stimulus. In its most basic form, a scanpath is presented as any undirected graph, without decorating the nodes (Figure 1).

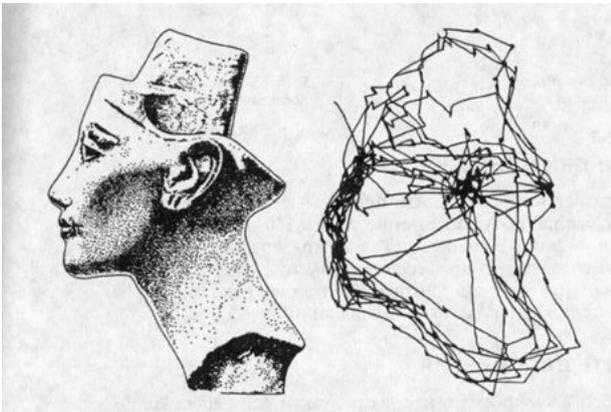


Figure 1. Scanpath of the eye movements (on the right) during free examination of an image of the Egyptian Queen Nefertiti (Yarbus, 1967, p. 181).

The scanpath visualization has many useful variations. The nodes of a scanpath can be encoded to show the duration of a fixation, either by color, or more commonly, by size (Figure 2). This allows the viewer to reconstruct the events: the order and duration of fixations. The color of fixations has been used to encode the speed of the person's gaze (Lankford, 2000).



Figure 2. Scanpath with node size depicting the duration of fixation. The color of node indicates the associated text line.

As noted by Blascheck et al. (2017), visual clutter is the primary problem of the scanpath visualization. If a scanpath is heavily overlapping, or if several scanpaths are overlaid,

the result is difficult to interpret. In addition, comparing the similarity of scanpaths is a challenge. The proposed solutions include averaging or bundling of scanpaths to simplify the diagram, adjusting the alpha channel of the drawing, and inspecting the horizontal and vertical information of fixations separately. Yet another approach with certain restrictions (using AOIs that have a natural linear ordering) is to emphasize the time aspect of a scanpath and to plot it as a time plot, having time and AOI as the axes of a scatterplot (Räihä et al., 2005). This presentation brings forward the pattern of scanpaths and allows easier comparisons.

Heatmap

Another common visualization of gaze data is a *heatmap*, which is based on the statistical cluster heat maps (Wilkinson and Friendly, 2009) and fixation maps. In statistics, the shaded matrix displays have been used for well over a century (see Loua (1873) for an example). In a fixation map, the stimulus observed is overlaid with an opaque layer that becomes increasingly transparent on the areas most heavily observed (Špakov, 2008, p. 44). In a heatmap, the overlay layer is semi-transparent, and the intensity of observation is encoded into color (Figure 3).



Figure 3. Heatmap: the product goes unnoticed if the model doesn't look at it (Lubin and Hudson, 2014).

The heatmap visualization is easy to implement and understand, and it scales remarkably well when a large number of observation sessions need to be aggregated. There are many variations of the technique, such as real-time heatmaps (Duchowski et al., 2012) and a variation where the eye gaze data modulates the transparency of the heatmaps (Špakov and Miniotas, 2007).

Visualization tools for analyzing gaze data in reading

EyeMap. *EyeMap* is a freely available Flash-based eye movement data visualization tool targeted for reading re-

search (Tang, Reilly, and Vorstius, 2012). It requires a relatively spatially-accurate (less than 0.2°) tracker with a high sampling frequency (>250 Hz) to facilitate letter-level analysis. EyeMap has six different visualizations to present the gaze data (Figure 4).

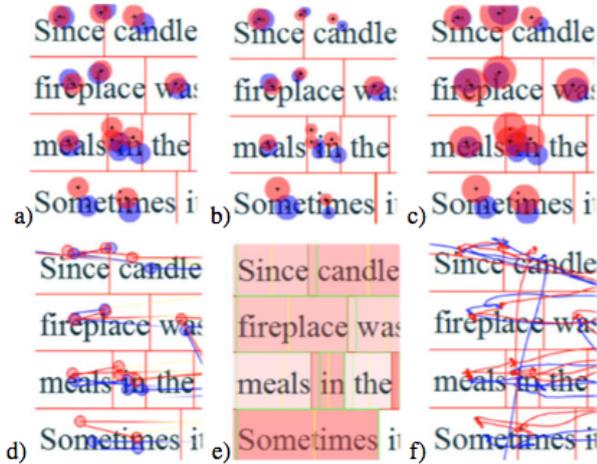


Figure 4. The six different data visualizations in EyeMap: a) fixation plot with fixed circle radius; b) fixation plot with fixation length encoded into circle size; c) pupil size encoded into circle size; d) gradually colored (encoding distance and direction) saccade lines with gaze points; e) word heatmap with word boundaries; and f) raw scan path. (Tang, Reilly, and Vorstius, 2012)

In conjunction with EyeMap, a novel XML format for gaze data was provided, specifically designed for reading research, to ease data import from a variety of eye trackers. Also yacc/lex-based data converters for the most common tracker formats were provided. EyeMap also supports the full Unicode standard, allowing it to be used with almost any language.

EyeMap allows integration of audio with the stimulus and visualization, facilitating the analysis of read-aloud studies. Adobe Flash is an unfortunate choice of platform, because it will be replaced with more secure and advanced technologies in the near future.

KiEV. Another visualization of reading data was developed in connection of translation studies (Špakov and Rähä, 2008). It focuses on displaying reading and writing activities as blocks plotted against time. Each block represents an action continued without significant interruption (Figure 5). Typing new text can overlap reading, but reading the source and target texts cannot take place at the same time.

Within reading blocks, all text read by a reader is displayed as well as the reading order. Regressions are emphasized with a distinct color. Bars above words represent fixations and their temporal dimension, thus reflecting the

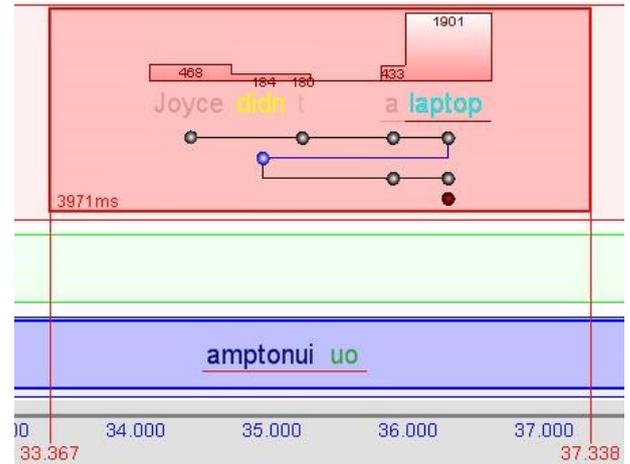


Figure 5. KiEV: visualization of reading the source text (top panel), reading the target text (middle panel, blank in this block), and typing the new translation (bottom panel) (Špakov and Rähä, 2008).

cumulative reading duration within the block. Most of the words are rendered with a transparency value that is inversely proportional to the accumulated reading time. The words starting or ending a regression are emphasized with distinct colors.

SocialReading. Cheng, Sun, Sun, Yee, and Dey (2015) have built a system called *SocialReading* to improve users' reading comprehension. The idea is to track expert users' (e.g. teachers) gaze during reading, and then annotate the text with visualizations for less-experienced readers (e.g. students). The area of interest in SocialReading is a paragraph, and they use a number of intra-AOI and inter-AOI measures to create comprehension-improving visualizations. The intra-AOI measures include reading speed and reading count (for a paragraph), and the inter-AOI measure is switching frequency between AOIs. The reading speed is encoded in the value (level of gray, darker is faster) of an AOI. The number of times the text was read is indicated by the width of the paragraph border. The switching frequency between AOIs is encoded into line width that connects the two paragraphs (Figure 6).

SocialReading has been evaluated with a user study. The outcome was that gaze-based annotations (or visualizations) resulted in better comprehension, and made the reading process more similar between experts and non-experts.

Summary

The three visualizations of reading behavior reviewed here are quite different, and reflect assumptions made about the needs of the respective target user groups. As the user group and their tasks are able to be more precisely defined, the higher the level of abstraction becomes and the further away

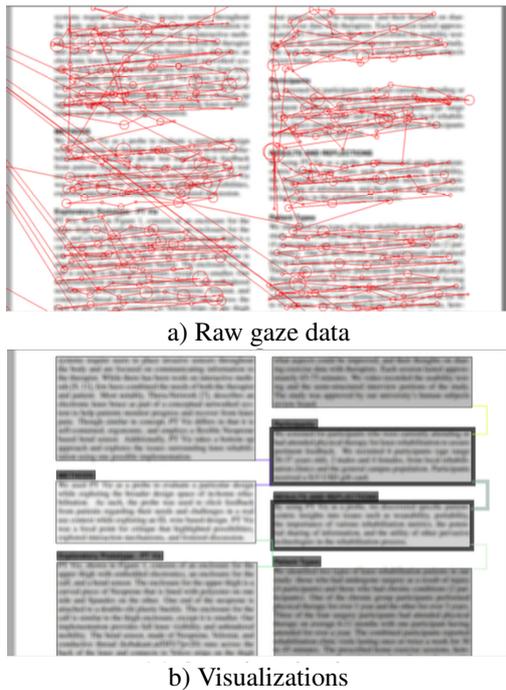


Figure 6. *SocialReading*: a) The raw data collected from expert readers, and b) the visualizations of experts' reading behaviour (Cheng et al., 2015).

the visualization is from the raw gaze data. The most precise user group description is possible with KiEV, then *SocialReading*, and the least with *EyeMap*.

System description

We have developed a web application that shows the text to be read in a browser. It tracks the reader's eye movements, and streams the collected gaze data up to a cloud database for further analysis. In addition, our system has a game that is really an eye tracker calibration in disguise. The gamified calibration – and the verification of the calibration – are essential in the school environment, because the teacher does not have time to oversee these activities individually for each student. This section describes the details of the system.

User interface

From the users' perspective, the system is just an ordinary web page with text to be read (Figure 7). While reading, there is no indication that the eye movements are being observed. The text is centered, both horizontally and vertically, because the eye tracker accuracy tends to deteriorate towards the peripheral screen area. This is not completely natural, and may affect the reading process as the length of line, font size and typeface, and the contrast between text and background all have influence (Hochuli, 2008, p. 9). However,

this limitation is always present in on-screen reading.

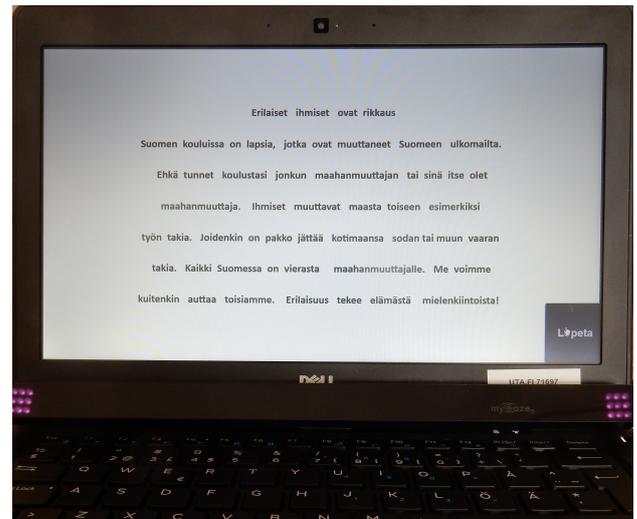


Figure 7. User interface. The page with the text fills the 13" screen in full-screen mode.

Hardware

Currently, the system uses *myGaze* eye trackers manufactured by *Visual Interaction GmbH*¹, in conjunction with *Sensomotoric Instruments*². The choice of the model was based on several factors, such as price, usage limitations (SDK license), mobility, and a comparison of device performance. The device is capable to provide 30 gaze points per second with an average accuracy of under 30 pixels in all directions. This accuracy was observed in about 15 minutes after calibration, in the class setting, where students were gazing at 48×24 pixels targets distributed across the screen.

The eye trackers were attached to Dell laptops with metal strips glued slightly below a 13" screen. Students were sitting approximately 50 cm from the screen. The screen resolution was set to 1366 × 768 pixels; thus, one visual angle degree corresponded to about 35 pixels. The laptops were powerful enough to run *myGaze* software smoothly in parallel with the web application for text presentation and data collection in Firefox browser (Intel i5-5300U@2.3GHz, 8MB).

Software

*ETU-Driver*³ with a *myGaze* plug-in and activated Web-Socket server was used to stream gaze data from the tracker to the web application. The web application utilized the *GazeTargets* library to handle gaze data received over Web-Socket. This library mapped gaze points onto text words and

¹<http://www.mygaze.com>

²<https://www.smivision.com>

³<http://www.sis.uta.fi/~csolsp/downloads.php>

notified the application when a word got or lost the focus. It also computed fixations in real-time. Word focusing events were then directed to two modules, one for syllabification of the words under certain conditions, and one for tracking the history of words visited by gaze. The latter module also received fixations. When reading/tracking was finished, this module uploaded the setup and recorded data (lists of text words, syllabified words, and fixations) into a Firebase database.

Gamified calibration

There were two main reasons for developing a game-like calibration for this study: 1) students would be able to perform the calibration without a help from the teacher or study supervisor, and 2) it would motivate students to complete the calibration carefully on repeated occasions.

The initial screen displayed locations of both eyes in the tracker camera view and an instruction of how to choose the best sitting position, descriptions of what will be displayed next, and actions needed to complete the calibration (see Figure 8). The button *Start* (Aloita) was enabled only if both eyes were visible and tracker-to-eyes distance was between 40 and 65 centimeters. After a student clicked the button (or pressed the space bar), the first target appeared in the center of a blank screen. The target was shown as a *bullseye* attached to a lamp that was switched off. An animated firefly moved from the top onto this lamp (see Figure 8). After a second, the lamp was switched on. A student then clicked the mouse or pressed the space bar to display the next lamp and move the firefly onto it. There were five calibration points (lamps) altogether. The firefly might revisit a lamp if the corresponding calibration point was considered as not calibrated reliably. At the end of the calibration the lamps disappeared and an image with ten embedded, partly visible, dimmed creatures appeared. The students were required to find the creatures, look at them, and click the mouse or press the space bar to “catch” them (see Figure 10) within 30 seconds. The pointer position was controlled by gaze and this acted as a calibration check. Players got points for each creature caught and, if all creatures were caught before time was up, for each second saved.

Syllabification

The chosen means of supporting readers automatically when difficulties reading a particular word were detected was *syllabification*, or displaying the word with its component syllables separated by hyphens. Finnish is a syllable-stressed language with transparent orthography. Therefore the role of syllables is heavily emphasized in Finnish reading instruction (Häikiö, Hyönä, and Bertram, 2015).

Word syllabification for Finnish follows some simple rules⁴ that are easy to implement. Still, there are exceptional words as well as some borrowed or compound words for



Figure 8. The calibration start screen.

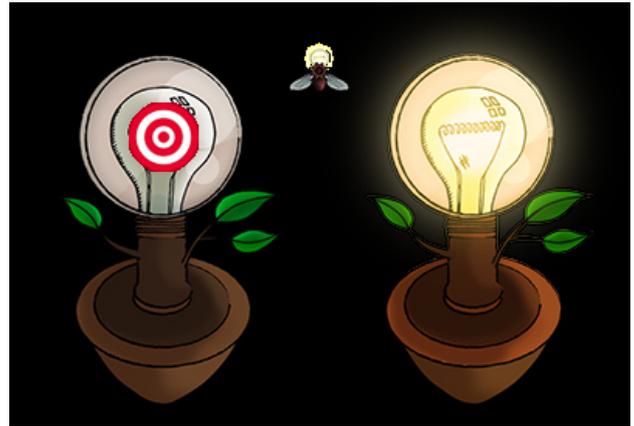


Figure 9. Calibration display objects: a lamp switched off with the *bull-eye*, a firefly, and the lamp switched on.

which the syllabification does not follow the rules. Syllabified representations for all such words found in the text used in this study were hard-coded.

The criterion for the syllabification of a word to be displayed was simply the cumulative time spent reading it: as soon as the cumulative reading time of a word exceeded a certain threshold, the word was automatically replaced with its syllabified representation. Since the hyphens used to separate syllables took up a certain space, words in the text were separated by a slightly larger space than usual. Short red hyphens were used to separate syllables, as shown in Figure 11.

To accommodate differences in reading speed between students and to ensure that syllabification occurred while the reader was still looking at the word, we developed a method to estimate the best trigger threshold. For this, we displayed an introductory page before the actual text. The application collected word reading events as students read this page, and calculated the threshold based on average word reading duration when they moved on to the first page of the task text.

⁴An example of rules can be found at <https://web.stanford.edu/~laurik/fsmbook/exercises/FinnishSyllabification.html>



Figure 10. Calibration game: a student should point at the creatures with gaze and click mouse or press space-bar to "catch" them.

Erilaiset ihmiset ovat rikkaus

Suomen kouluissa on lapsia, jotka ovat muuttaneet Suomeen ulko-mail-ta.
 Ehkä tunnet koulustasi jonkun maa-han-muut-ta-jan tai sinä itse olet
 maa-han-muut-ta-ja. Ihmiset muuttavat maasta toiseen esimerkiksi
 työn takia. Joidenkin on pakko jättää kotimaansa sodan tai muun vaaran
 takia. Kaikki Suomessa on vierasta maahanmuuttajalle. Me voimme
 kuitenkin auttaa toisiamme. Eri-lai-suus tekee elämästä mie-len-kiin-tois-ta!

Figure 11. Text page with four words syllabified with short red hyphen.

The threshold was set at 4 times the average word reading duration, but limited to at least 1.5 seconds and at most 3 seconds.

Visualization of reading data

In the visualization of reading, we abstract the gaze data one step further from fixations and saccades: we want to see how long and how many times the *words* are fixated, and in which order. Often the gaze data is analyzed by dividing the gaze target into areas of interest (AOIs) – in our case, the words constitute the AOIs.

We have implemented five different methods to present the gaze data of reading. Two of them – *Gaze replay* and *Word replay* – are animated views to show the change over time, and *Gaze plot*, *Word reading durations* and *Student summary* are static views that summarize the data. In this section we describe the visualizations.

Gaze plot

Gaze plot is perhaps the most traditional visual presentation of gaze data, akin to plots used by Yarbus (1967). *Gaze plot* is a visualization of a single reader's fixations and

saccades overlaid on the text (Figure 12). The fixations are shown as semi-transparent circles, and the circle's size (area) is in proportion to the duration of the fixation. The saccades are shown as blue lines connecting the fixations. The color coding of the fixation circles maps them to the lines of the text, and the unmapped fixation circles are drawn in black. The gaze-to-line mapping is similar to the one suggested by Beymer and Russell (2005).

This kind of visualization reveals some aspects of the reading behavior, such as backtracking, which is generally an indication of problems, either in reading or comprehension. It also reveals if any of the words were syllabified during the reading (as "kun-ta-lai-nen" is in Figure 12). In addition, *Gaze plot* serves as a diagnostic tool showing the quality of tracking and the gaze-to-word mapping.

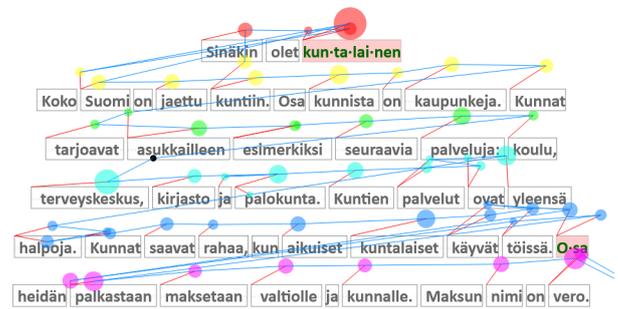


Figure 12. *Gaze plot*: fixations as circles and saccades as blue connector lines. The color-coding indicates association with text lines, and the red lines map each fixation to the corresponding word.

Gaze replay

As the name suggests, *Gaze replay* is an animation of gaze behavior in a reading session. It shows the gaze pointer as a circle having the size in proportion to the current fixation duration – so the size of the circle keeps growing while the gaze remains at the same location. Figure 13 shows a moment in the animation where six readers' gaze pointers are displayed. The readers and the pointers are connected by color-coding, which is shown in the top left corner. The replay is synchronized to make all readers start at the same time, and a check mark appears next to a reader's name whose data has finished to replay.

Syllabified words are displayed with a pink background at the (relative) time of the syllabification event, thus at the end of the replay all the syllabified words for all the readers are shown. The replay can be paused or restarted, and there will be a timeline slider in the forthcoming version.

Gaze replay allows observing the reading as it would happen in real time, either for a single reader or a group of readers. It is easy to see if there are problems in reading strategy or behavior, and to make comparisons.

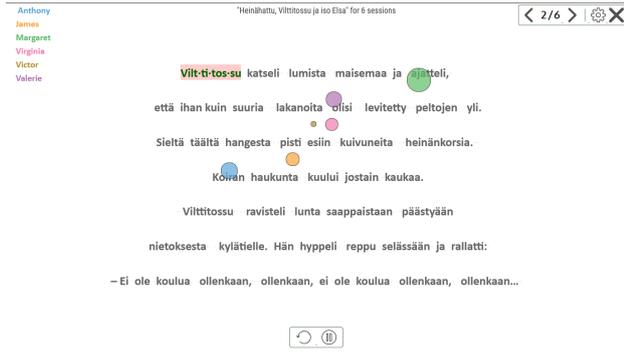


Figure 13. Gaze replay. The gaze pointer color corresponds to the color of student name.

Gaze replay can be seen as an animated version of the *Gaze plot* visualization. The occlusion and clutter problem is circumvented by showing the saccades as movement only, without leaving a trail behind. This approach allows observing and comparing the gaze behavior of several readers at the same time.

Word replay

Word replay is another animated view into gaze data of a reading session. This visualization presents the progress of reading as a grid where we have readers in the columns and the text on the rows, one word per row (Figure 14). Each reader's gaze pointer is indicated as a constant size orange circle that moves down the column as reading progresses. The gaze pointer is visible only when a fixation on a word is detected.

At the beginning of *Word replay* all the cells in the grid are white. The gray level of cells gets gradually darker based on the gaze time spent on them. There are 20 levels of gray, each corresponding to 250 milliseconds of gaze time. Finally, a cell turns black if the accumulated gaze time exceeds five seconds. When the reader has spent time on all cells, the text "done" is displayed at the bottom of the corresponding column (Figure 15).

The *Word replay* visualization shows the progress of reading over time, and indicates how the reading time is distributed over the text. This visualization provides insight on several things, such as:

- Who are the slowest/fastest readers?
- Which words are difficult for some/all readers?
- Are there differences in reading strategies?
- Does anyone exhibit re-reads (backtracks)?
- Do grammatical cases cause slowdowns?

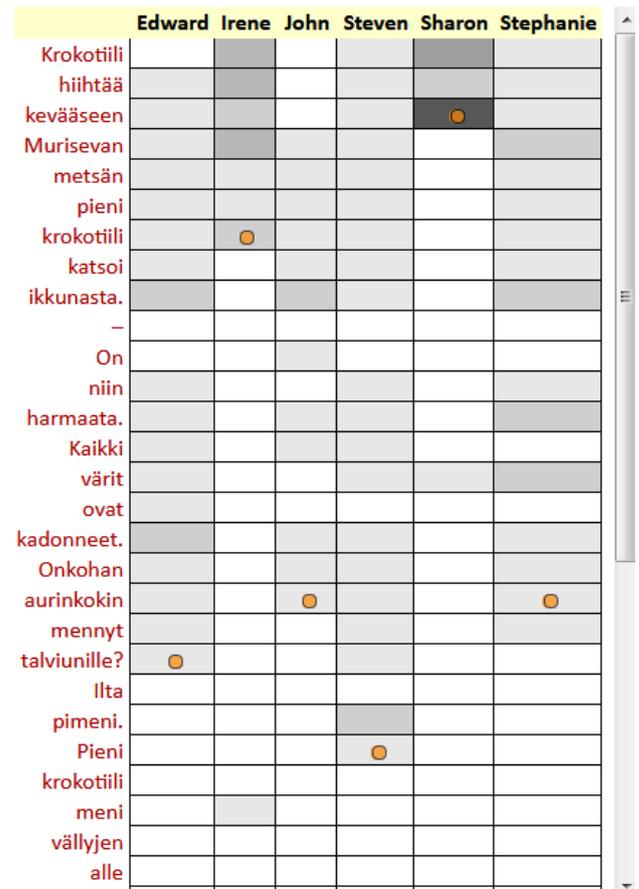


Figure 14. Word replay. The list of words and students' replay tracks are displayed vertically. Cell darkness is proportional to the word reading duration by the corresponding student.

In the snapshot in Figure 14, it is clear that Irene and Sharon are struggling with the text and the rest of the readers are progressing fluently. In addition, all but one of the fast readers have a slight slowdown at the word "ikkunasta", possibly caused by the grammatical case (relative case of the word "ikkuna").

Word reading durations

It is also possible to view the reading durations of words in a tabular form (Figure 16). The contents of this table are shown for the currently selected readers, and it displays the sum of reading durations for each word, in descending order. This table gives a quick insight of which words were the most difficult for the readers. Generally, the top of the list is occupied by longer and less common words.

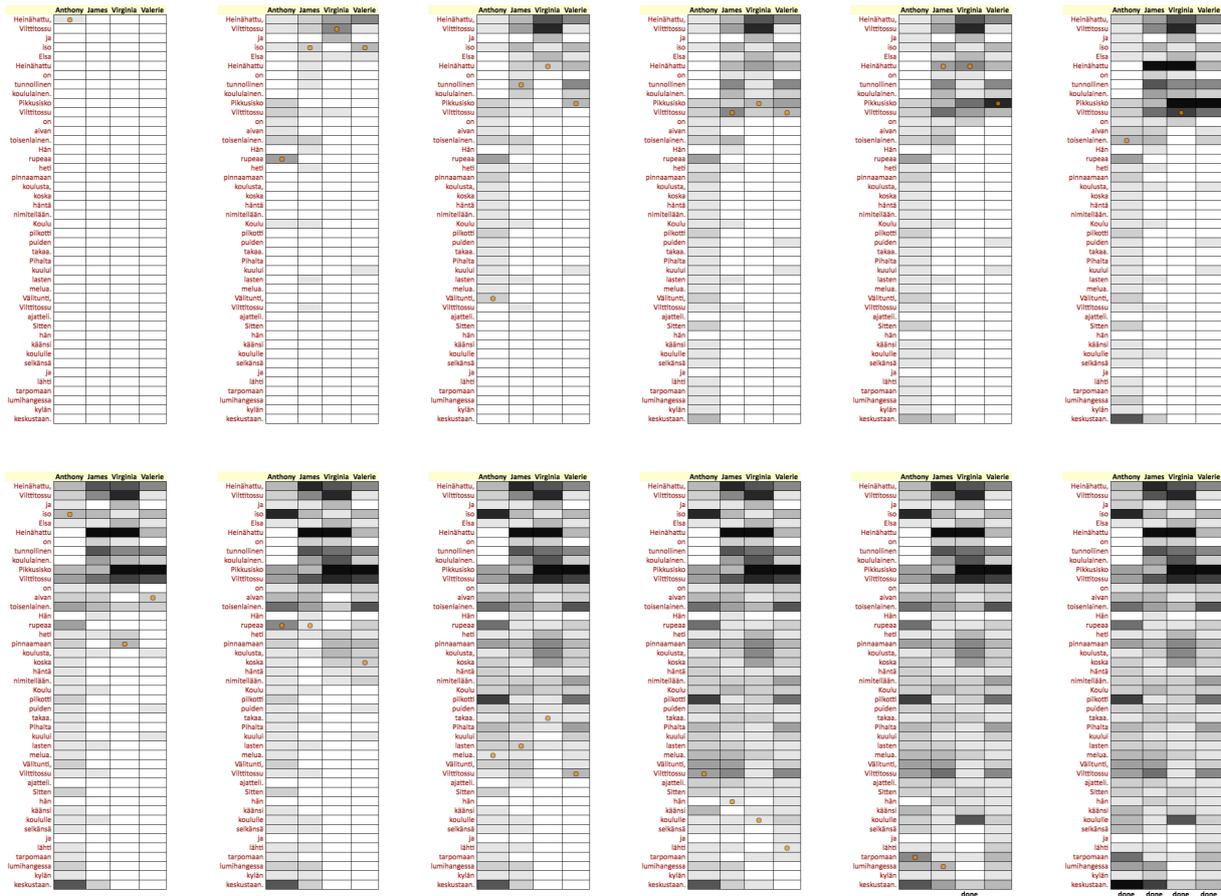


Figure 15. Progress of the Word replay visualization.

Student summary

Finally, *Student summary* is an interactive table showing a summary of the reading performance for each reader (Figure 17). The statistics include the number of reading sessions, the overall time spent on reading, the average time to read a word, the average fixation duration, and the overall number of syllabified words. The user can sort the table by columns.

This visualization provides a quick quantification of the readers’ performance. However, the current version does not support the viewing of progress over time (several reading sessions).

Assessment of the Visualizations

The visualizations were assessed by means of a questionnaire to collect opinions from experienced teachers. Two of the respondents are from a local school where the system was initially tested, and all the rest are participants of the Interactive Technology in Education (2017) conference where the

project organized a hands-on ‘Future Lab’ to demonstrate the system.

Demography

Twenty respondents (twelve women and eight men) from 28 to 60 years of age (mean 46 years) agreed to fill in the questionnaire after they had tried out the system. Their teaching experience ranged from 2 to 36 years, 15 years was the average. Their teaching positions varied from primary school to university, including special needs education, vocational school and teacher training school. Subjects taught in the primary and secondary schools varied a lot, but most of them were involved in teaching either L1 or L2 languages (the child’s native language or second language).

Four of the respondents did not provide a ranking for the visualizations, therefore the ranking summary is based on the answers of 16 participants.

| Reading durations | |
|-------------------|-------|
| Pikkusisko | 46.94 |
| Heinähattu | 31.19 |
| Vittitossu | 31.18 |
| tunnollinen | 29.17 |
| Heinähattu, | 27.25 |
| pinnaamaan | 26.11 |
| Vittitossu | 23.39 |
| toisenlainen. | 23.21 |
| Vittitossu | 22.03 |
| piikotti | 21.22 |
| Valitunti, | 19.09 |
| keskustaan. | 17.55 |
| Pihalla | 16.04 |
| iso | 14.33 |
| rupeaa | 14.31 |
| koulusta, | 14.20 |
| koululainen. | 14.16 |
| nimitellään. | 13.82 |
| lumihangessa | 13.29 |
| puiden | 11.86 |
| takaa. | 11.63 |
| heti | 11.46 |
| ajatteli. | 10.86 |
| aivan | 10.66 |
| Koulu | 10.54 |

Figure 16. Table showing the sum of reading durations per each word in descending order, as seconds. The table is generated for currently selected readers.

| | Sessions | Reading time | Seconds per word | Fixation, ms | Hyphenations |
|-----------|----------|--------------|------------------|--------------|--------------|
| Anthony | 1 | 7:59 | 1.46 | 511 | 10 |
| David | 1 | 5:52 | 0.90 | 812 | 9 |
| Edward | 1 | 4:55 | 0.60 | 414 | 0 |
| Irene | 1 | 11:54 | 1.67 | 903 | 14 |
| John | 1 | 4:27 | 0.68 | 432 | 0 |
| James | 1 | 7:06 | 1.48 | 489 | 5 |
| Jerry | 1 | 10:14 | 1.90 | 876 | 30 |
| Margaret | 1 | 7:21 | 1.54 | 1414 | 42 |
| Natalie | 1 | 9:06 | 1.69 | 1548 | 36 |
| Steven | 1 | 4:55 | 0.60 | 416 | 0 |
| Shirley | 1 | 4:18 | 0.80 | 666 | 12 |
| Sharon | 1 | 9:46 | 1.34 | 807 | 15 |
| Stephanie | 1 | 4:52 | 0.59 | 466 | 0 |
| Thomas | 1 | 5:12 | 0.97 | 712 | 3 |
| Virginia | 1 | 7:55 | 1.45 | 649 | 10 |
| Victoria | 1 | 3:12 | 0.60 | 421 | 1 |
| Victor | 1 | 7:12 | 1.50 | 790 | 0 |
| Valerie | 1 | 7:12 | 1.50 | 688 | 10 |

Figure 17. Student summary with statistics for each student on the number of texts read, total time spent on reading, average time spent on reading a word, average fixation duration and total number of syllabified words.

Results

In the first part of the questionnaire the respondents were asked to rate each visualization on a seven-point scale, ranging from *not at all informative* to *extremely informative*. In addition, they had a chance to state one positive and one negative feature of the visualization.

Figure 18 shows the summary of the given ratings as boxplots, grouped by respondent's gender. Although there is nothing gender-specific in the topic per se, it was observed that women and men respondents rated the visualizations differently. Both genders agreed that *Gaze plot* and *Word replay* are *very informative* (median 6). But then *Gaze replay* and *Student summary* were rated *extremely informative* (median

7) by women and *very informative* (median 6) by men.

Overall, *Student summary* was rated *extremely informative* (median 7), and for all the others the rating was *very informative* (median 6).

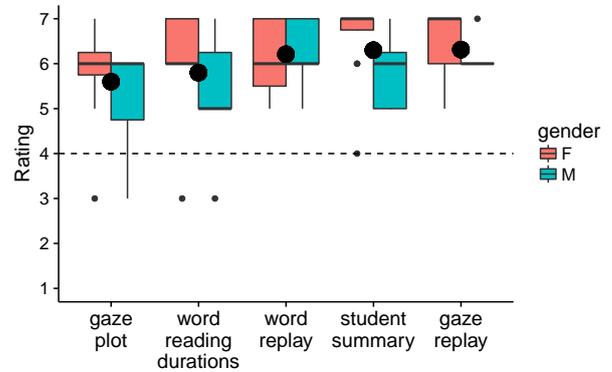


Figure 18. Rating of visualizations as boxplots with scale 1 to 7 (1 being *not informative at all* and 7 being *extremely informative*). The boxplots are divided per gender, and the (large) black dot indicates the overall mean per visualization.

In the second part of the questionnaire the respondents were asked to rank the visualizations in order of their usefulness (Figure 19). This result is slightly different from the rating result. *Student summary* and *Gaze plot* both got five first place rankings as the most useful for a teacher of students learning to read. If first place and second place rankings are taking into account, *Gaze replay* was the favorite because of many second place rankings. *Word reading durations* was mainly ranked fourth. The *Word replay* got fairly even ranking for all positions except for the 'most useful visualization'.

Figures 20 and 21 illustrate the rankings as proportions of the rank (Figure 20) and as cumulative ranks (Figure 21). Again, it is easy to see that *Student summary*, *Gaze plot* and *Gaze replay* are above the diagonal, and *Word reading durations* is the lowest ranked.

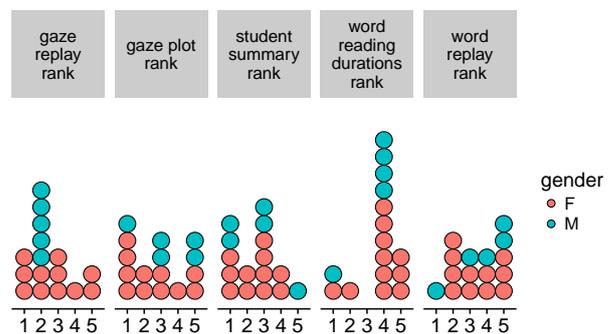


Figure 19. Ranking of visualizations as a dotplot with 1 being the most useful and 5 being the least useful. The color of dot encodes the respondent's gender.

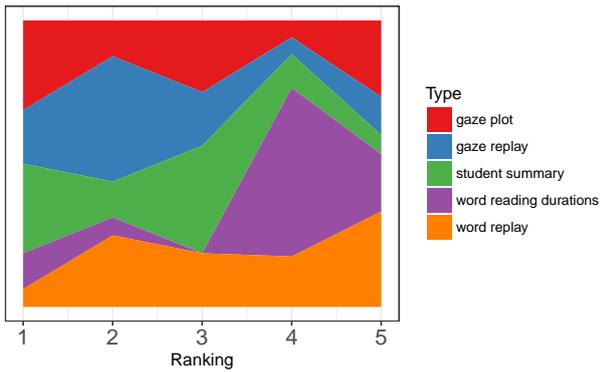


Figure 20. Proportions of rankings for each visualization.

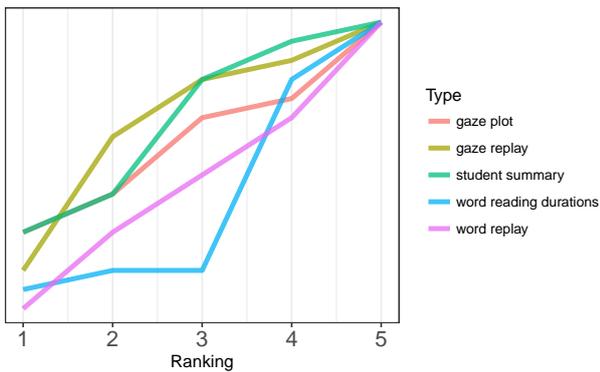


Figure 21. Cumulative rankings for each visualization.

Discussion

In discussions after the questionnaires had been completed, the teachers pointed out that all visualizations were informative, so they found it hard to fill in the ranking table. They described *Gaze plot* as providing a good overview of data collected and revealing strategies that students used to read. Some noticed that the color-coding of fixations was useful and helped them in inspection of the gaze path, but some disagreed with this point of view, as the mapping was not accurate for some fixations.

Word reading durations helped teachers to quickly capture the words most difficult to read. *Gaze replay* gave an insight into “the general situation in classroom in terms of reading ability”. Teachers reported that with *Gaze replay* it was easy to check whether the students’ reading behavior was as expected, whether the reading speed is sufficient, which words caused problems and what were the differences in the reading process between the readers. Gaze pointer color-coding was also clear.

Similar responses were recorded for the *Word replay* visualization. Teachers emphasized that persistent visualization of the accumulated reading time was helpful for identifying the difficult words quickly. It was noted that this identifi-

cation is still possible after the replay has finished. Some, however, pointed out that the visualization is a bit hard to understand and it does not allow to inspect when readers jump to the next line.

In *Student summary* teachers found that the reading data is present in a clear way. They liked the ability to compare the reading speed and commented that even in the current implementation this summary would allow them to inspect students’ reading performance progress. They claimed they would use it when creating reports on student development. Some teachers wished to join this data with data collected in other assessments of student performance into a single table for convenience.

For many visualizations the teachers reported that they missed some kind of the text comprehension evaluation, therefore gaze data alone are not sufficient. According to the comments, reading speed would not tell much about the reading ability if text comprehension was insufficient. Reading comprehension assurance was the most often requested missing feature.

Case Studies

Of particular interest to us were the teachers of the two classes whose students we tested. The teachers knew the children and anticipated each to show a certain level of reading proficiency.

Interestingly, there were surprises to both teachers. When we viewed the visualizations in a debriefing after collecting the data, both found in their classes one child that was a slower reader than they expected, and vice versa, one child that read faster than expected.

For instance, Isabel⁵ from the third grade participated in a session where six students read a three-page document. She finished second on all three pages, which was a surprise to the teacher. Her reading ability was obvious in, e.g., *Gaze plot* (Figure 22): the reading proceeds smoothly without getting stuck at any point. In contrast, Nancy was the slowest reader in the group of six. Her *Gaze plot* (Figure 23) also shows progress at a regular, but much slower pace, mainly because of the longer fixations. This has led to three words being hyphenated on this page.



Figure 22. *Gaze plot* for Isabel.

⁵All names have been changed.

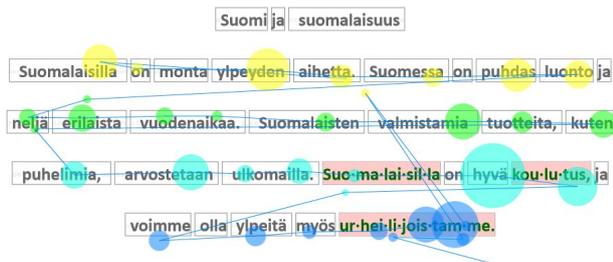


Figure 23. Gaze plot for Nancy.

Figure 23 also illustrates a phenomenon that came as a surprise to us: many children skipped the title (first line) of the page. This initially had a significant negative impact on the gaze-to-word mapping, since it was based on the assumption that the children would read the texts linearly, from the first to the last line. When this behavior was discovered, the mapping was modified so that it now tries to match the data in two ways: with or without the reading of the title line. Figure 23 shows that this now does not bother the algorithm which has realized that the title line was not read.

We viewed the visualizations one-by-one with the teachers. The third-grade teacher commented that *Gaze plot* was useful in showing whether reading progressed systematically, and whether a child had problems in perceiving the text. This became evident if gaze jumped back and forth between lines. *Word reading durations* were useful for pinpointing unknown words that did not yet belong to the vocabulary of the children. *Gaze replay* was appreciated for showing the progress of many readers at the same time; this saved a lot of time, and helped to pick out the students that need more attention. While *Gaze replay* thus was useful for sorting out the good readers from the less good ones, *Word replay* conversely was useful for picking out words that typically were skipped, or that took a long time. Finally, *Student summary* had many advantages: it could be used in formal evaluation, in planning support activities, and in communicating progress over time to parents.

In the debriefing sessions it became evident that teachers need some coaching in interpreting the gaze data, in particular to take into account that there is noise in the gaze points delivered by the tracker. This is caused by several reasons, including poor calibration and lack of concentration by the student. Consequently, the relative order of the gaze points and fixations is more important than their exact location. Nevertheless, teachers were highly appreciative of being able to see the reading process “through the eyes of the student”.

Conclusions

We have developed several new visualizations of gaze data collected from primary school students. The visualizations were devised for showing the reading proficiency of children

who have fairly recently learned to read fluently, and with high variation in their reading skills.

The visualizations were evaluated using questionnaires filled in by twenty teachers. In addition, visualizations of data collected from the teachers of two classes, second and third grades, were analyzed in detail with the teachers.

Both evaluations highlight that the various visualizations have their place and serve different purposes. The dynamic visualizations (*Gaze replay* and *Word replay*) help to give the teachers a good understanding of how the individual students read. In addition, they help in comparing the skills of a group of students reading the same text. The static visualizations (*Gaze plot*, *Word reading durations*, *Student summary*) help in getting a simple overview of both the children and their active vocabulary. Several teachers explicitly commented that we should retain all the visualizations in future versions of our tool.

So far we have focused on developing visualizations of a single reading session. In future work we will also develop visualizations for showing the development of the reading skill of a student over several reading sessions.

Acknowledgements

We are sincerely grateful to the teachers and children of the 2B and 3B classes at Lamminpää Primary School for their cheerful and committed co-operation. Inka Hyrskykari was instrumental in running the data collection sessions at the school. Tiia Viitanen and Terhikki Kataja from Tampere University of Applied Sciences designed and produced the calibration game. Daniel Trifonov from Visual Interaction helped us with the myGaze software.

This research was funded by the Academy of Finland, project *Private and Shared Gaze: Enablers, Applications, Experiences (GaSP)*.

In presenting the questionnaire data we used *Statistical System R* (R Core Team, 2017) and *tidyverse* packages (Wickham, 2017), especially *ggplot2* (Wickham, 2010).

References

- Beymer, David and Daniel M. Russell (2005). “WebGazeAnalyzer: A System for Capturing and Analyzing Web Reading Behavior Using Eye Gaze”. In: *CHI '05 Extended Abstracts on Human Factors in Computing Systems*. CHI EA '05. ACM, pp. 1913–1916.
- Blascheck, Tanja, Kurt Kurzhals, Michael Raschke, Michael Burch, Daniel Weiskopf, and Thomas Ertl (2017). “Visualization of Eye Tracking Data: A Taxonomy and Survey”. In: *Computer Graphics Forum*. URL: <https://dx.doi.org/10.1111/cgf.13079>.

- Cheng, Shiwei, Zhiqiang Sun, Lingyun Sun, Kirsten Yee, and Anind K Dey (2015). “Gaze-based annotations for reading comprehension”. In: *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems*. CHI ’15. ACM, pp. 1569–1572.
- Duchowski, Andrew T., Margaux M. Price, Miriah Meyer, and Pilar Orero (2012). “Aggregate gaze visualization with real-time heatmaps”. In: *Proceedings of the Symposium on Eye Tracking Research and Applications*. ETRA ’12. ACM, pp. 13–20.
- Häikiö, Tuomo, Jukka Hyönä, and Raymond Bertram (2015). “The role of syllables in word recognition among beginning Finnish readers: Evidence from eye movements during reading”. In: *Journal of Cognitive Psychology*, pp. 562–577. URL: <https://dx.doi.org/10.1080/20445911.2014.982126>.
- Hochuli, Jost (2008). *Detail in typography*. Translated from the German-language edition published by Verlag Niggli AG, Sulgen/Zürich, 2005. Hyphen Press, London.
- Interactive Technology in Education (2017). *Interactive Technology in Education, ITE2017*. <http://itk.fi/2017>. URL: <http://itk.fi/2017/info/english>.
- Karn, Keith S., Steve Ellis, and Cornell Juliano (2000). *The Hunt for Usability: Tracking Eye Movements*. URL: <http://bulletin.sigchi.org/2000/november/hunt-for-usability>.
- Lankford, Chris (2000). “Gazetracker: Software Designed to Facilitate Eye Movement Analysis”. In: *Proceedings of the 2000 Symposium on Eye Tracking Research & Applications*. ETRA ’00. New York, NY, USA: ACM, pp. 51–55. URL: <http://doi.acm.org/10.1145/355017.355025>.
- Loua, Toussaint (1873). *Atlas statistique de la population de Paris*. J. Dejey & cie. URL: <https://books.google.ca/books?id=yVDkyoNPZEwC>.
- Lubin, Gus and Hayley Hudson (2014). *29 Eye-Tracking Heatmaps Reveal Where People Really Look*. URL: <http://www.businessinsider.com/eye-tracking-heatmaps-2014-7> (visited on 04/26/2017).
- R Core Team (2017). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing. Vienna, Austria. URL: <https://cran.r-project.org>.
- Räihä, Kari-Jouko, Anne Aula, Päivi Majaranta, Harri Rantala, and Kimmo Koivunen (2005). “Static visualization of temporal eye-tracking data”. In: *Human-Computer Interaction*. INTERACT 2005. Springer, pp. 946–949.
- Špakov, Oleg (2008). “iComponent - Device-Independent Platform for Analyzing Eye Movement Data and Developing Eye-based Applications”. Dissertations in Interactive Technology, Number 9. University of Tampere.
- Špakov, Oleg and Darius Miniotas (2007). “Visualization of eye gaze data using heat maps”. In: *Elektronika ir Elektrotechnika* 74.2, pp. 55–58.
- Špakov, Oleg and Kari-Jouko Räihä (2008). “KiEV: A Tool for Visualization of Reading and Writing Processes in Translation of Text”. In: *Proceedings of the 2008 symposium on Eye tracking research & applications*. ETRA ’08. ACM, pp. 107–110.
- Tang, Siliang, Ronan G Reilly, and Christian Vorstius (2012). “EyeMap: a software system for visualizing and analyzing eye movement data in reading”. In: *Behavior Research Methods* 44.2, pp. 420–438.
- Wickham, Hadley (2010). *ggplot2: Elegant Graphics for Data Analysis (Use R!)* Springer.
- (2017). *tidyverse: Easily Install and Load 'Tidyverse' Packages*. URL: <https://blog.rstudio.org/2016/09/15/tidyverse-1-0-0/>.
- Wilkinson, Leland and Michael Friendly (2009). “The History of the Cluster Heat Map”. In: *The American Statistician* 63.2, pp. 179–184. URL: <http://ideas.repec.org/a/bs/amstat/v63i2y2009p179-184.html>.
- Yarbus, Alfred L. (1967). *Eye Movements and Vision*. Plenum Press.